

LDAP configuration details:

name rmutl.local

config file name om_ldap.cfg (Same folder as hibernate.cfg.xml)


Add Domain to username checked. Example: User enters "hans" domain is specified as "localhost.com", login that is verified against Ldap is: hans@localhost.com

Domain rmutl.local

7.0. Config file name: om_ldap.cfg

8. restart service red5

9. Domain login

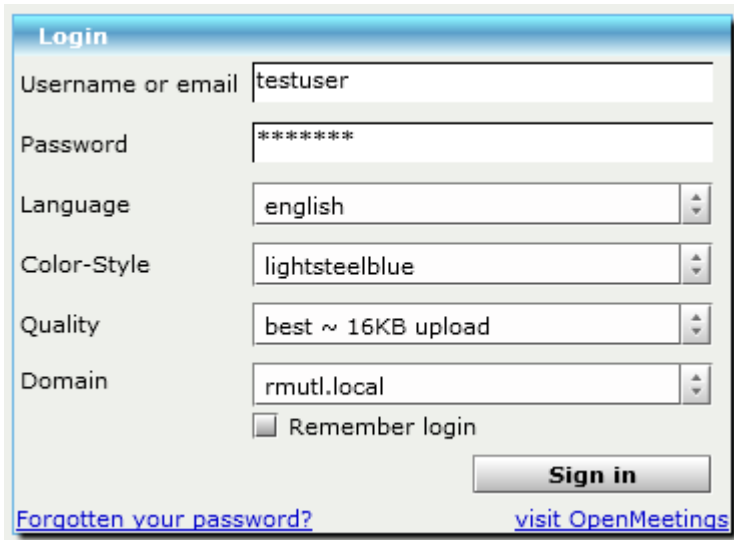

10. ldap user & password

** log